



# Plantlight assembly instructions


CODES

1001  
1003

Your 1000 series plantlight is designed to bring you years of satisfaction. While assembly is not difficult, please take the time to organize all of the parts, and just as importantly, create a scratch free workspace at a comfortable height to assure a successful and enjoyable assembly.

Page 1 of 2

## Parts List

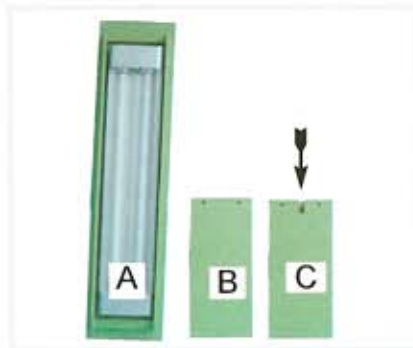

- A) Light Hood (1)
- B) Side Slider (1)
- C) Side Slider with cord notch (1).  
(Note arrow)



- D) Long Side Panel (2)
- E) Bottom Panel (1)
- F) Side Panel Base (2)



- G) Height Adjustment Pegs (4)
- H) Slider to Light Hood Screws (4)




- I) Cam-loc Peg (8)
- J) Cam-loc Housing (8)


**NOTE:** The assembly steps for the Plant Light Box and Herb Light Box are similar. The 1003 Herb Light Box was used to illustrate these instructions. The 1001 Plant Light Box has 2 additional pieces shown in steps 11 and 12. These pieces are the Humidity Tray and Wooden Slats.

## Assembly steps


- 1) Screw four Cam-loc Pegs (I) into the Long Side Panel (D)

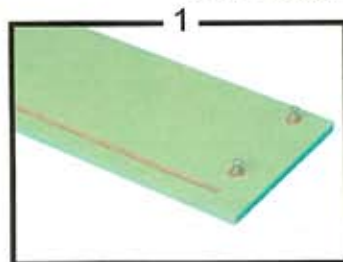


- 2) Insert the Cam-loc Housing (J) into the holes in the Side Panel Base (F). Place the pointed driver slot with the + and - towards the hole as shown.

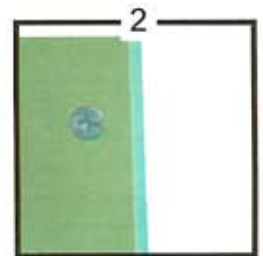

- 3) Attach one of the the Long Side Panels (D) to the Side Panel Base (F) by inserting the Cam-loc Pegs into the holes in the Side Panel Base. Be sure the slot in the Long Side Panel is towards the bottom of the base. Rotate the Cam-loc Housing in the direction of the + sign to tighten the assembly.

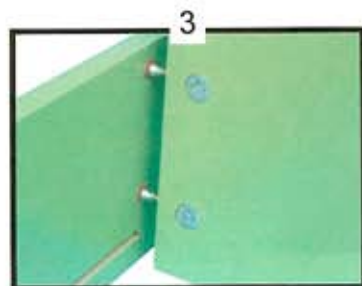

- 4) Place the Assembled Long Side Panel and Side Panel Base with the Long Side Panel on the table and insert the Bottom Panel (E) into the slot in the Long Side Panel.

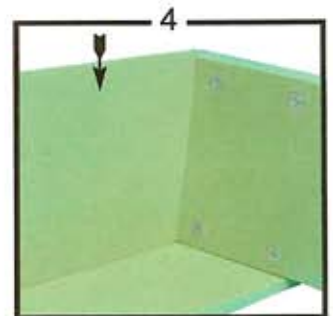

Rotate until the Long Side Panel is drawn to the Side Panel Base. Repeat for the other Side Panel Base (F).



5) Attach the remaining Long Side Panel (D) to the Side Panel Base (F) being sure to capture the Bottom Panel (E) in the slot of the Long Side Panel (D).




6) Insert two Height Adjustment Pegs (G) into the middle set of holes in each Side Panel Base (F). The pins do not thread into the holes. The threads on the pins provide grip.




7) Slide both the Side Slider w/ cord notch (C) and Side Slider w/o notch (B) in to the Side panel Base. The notch should face into the box. Be sure the large holes at the top of the Side Sliders (C and D) face out.



8) Slide the wall plug end of the power cord through both the Side Slider (C) and Side Panel Base assembly at one side of the box. The light plug end should be left hanging through the notch at the top.




9) Insert the light plug end of the power cord securely into the Light Hood (A) and set it onto the Side Sliders (C and D) Use the long screws (H) to attach the Light Hood to the Side Sliders.



10) If the cord is on the wrong side of the box for the desired wall outlet, the entire light top and assembled side panels will lift straight up and the power cord can be removed and the top reinserted with the power cord on the opposite end of the box.

**NOTE:** If you have assembled an Herb Box skip to step 13. Steps 11 and 12 are for the PlantLight Box only.

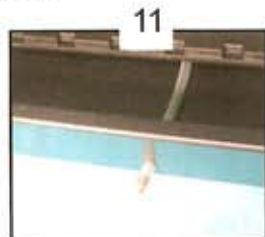

11) Remove the brass cap from the tray hose and pull approximately six inches (6") of hose from the Humidity Tray.



12) Slip the threaded end of the hose through the drain hole in the Front Side Panel and set the tray down into the box. Replace the brass cap and push the hose back into the tray. The Wood Slats can be inserted into the indents on the rim of the humidity tray to elevate the plants above the bottom of the tray.

13) Arrange plants in the completed light box and enjoy them.



Code 1001



Code 1003